




Submittal Data: **Ceiling Cassette**
 Model: **CAS024C6CO/OTS018CR6**
 Style: **Cool Only**


Job Name: _____ Location: _____
 Purchaser: _____
 Engineer: _____
 Submitted To: _____ For: Reference Approval Construction
 Submitted By: _____
 Unit Designation: _____ Schedule Number: _____ Model Number: _____

Capacities:		
Cooling	Btu/Hr	18,000
Heating	Btu/Hr	N/A
Outdoor Temp.	F°	95
SEER		11.9
Average Cooling Capacity (ft)		1,000
Indoor Unit		
Power Supply	Volts	220
Power Supply	Hertz	60
Moisture Removal	Lbs/Hr	6.13
Weight	Lbs	55.12
Noise Level	dB(A)	37
Air Flow Rate	CFM	700
Outdoor Unit:		
Power Supply	Volts	220
Max Fuse Size	Amps	20
Running Current	Amps	9.29
Weight	Lbs	127.0
Refrigerant Piping:		
Max Height Difference	Feet	25
Max Total Length	Feet	60
Discharge Liquid Line	Inch	3/8"
Suction Line	Inch	5/8"
Drain Line	Inch	3/4"

Outline and Dimensions

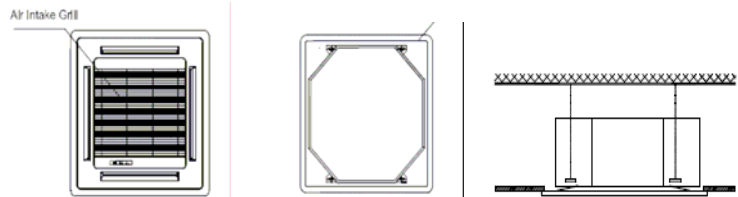

Front Panel Depth: 3.15 in. Width: 37.4 in. Height: 37.4 in.
 Unit Depth: 11.42 in. Width: 32.68 in. Height: 32.68 in.

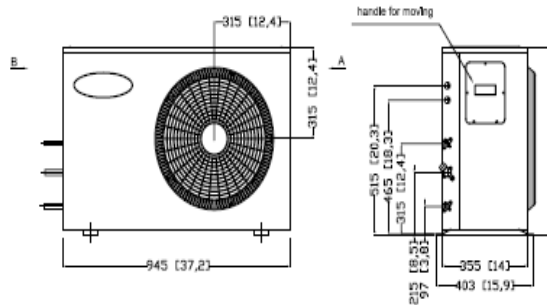

Depth: 14.02 in. Width: 37.2 in. Height: 25.55 in.

Standard Features:

- Five Year Compressor Warranty
- R22 Refrigerant
- "Dry" Mode Reduces Water
- 24-Hour Programmable Timer
- Low-Pressure Protection Switch
- One Year Parts Warranty
- LCD Wireless Remote
- Energy Saving "Sleep" Mode
- 4 Way Discharge Louver
- High-Pressure Protection Switch
- Low Ambient Control Kit
- Self-Diagnosis Function
- "Hydrophilic" Blue Coated Fins
- Heavy-Gauge Galvanized Steel
- Outlet Air Directional Control

Notes:
